

Appendix A

Traffic Crash Data Analysis



Prepared for:



**State of Alaska
Department of Transportation and
Public Facilities**

Prepared by:
**HDR Alaska, Inc.
2525 C Street, Suite 305
Anchorage, Alaska 99503**

February 2014

This page intentionally left blank.

Table of Contents

Section 1	Introduction.....	1
1.1	Overview.....	1
1.2	Crash Analysis Data and Methodology.....	1
Section 2	Study Area Crash Data	1
2.1	Crash Rate Description.....	1
2.2	Study Area Crash Rate.....	2
2.3	Study Area Seasonal Crash Rate.....	2
2.4	Study Area Crash Injury Severity (Year-round).....	3
Section 3	Analysis of Crash Rates, Locations, and Types	4
3.1	Crash Rate by Milepost.....	4
3.2	Study Area Crash Type.....	5
3.2.1	Fixed-Object/ Overturn/Run-Off-The-Road Crashes	6
3.2.2	Vehicle Rear-End, Head-On, and Angle Crashes.....	6
3.2.3	Moose-Related Crashes	6
3.3	High Crash Locations	8
3.3.1	Analysis of MP 52.0 to 52.9	8
3.3.2	Analysis of MP 57.0 to 57.9	9
3.3.3	Analysis of MP 47.0 to 47.9	9
3.4	Comparison of Crash Severity within the Study Area, the Entire Sterling Highway, and Statewide	9
3.5	Comparison of Unimproved and Improved Sections of the Sterling Highway.....	10
Section 4	Summary of Findings	11
References	12

Appendices

Appendix A:	Maps.....	Following page 12
Appendix B:	Tables.....	Following page 12
Appendix C:	Figures.....	Following page 12

List of Tables

Table 1. Study Area Seasonal Crash Rate	3
Table 2. Study Area Crash and Personal Injury Summary from January 2000 to December 2009.....	3
Table 3. Top Study Area and Adjacent Segment Crash Locations (2000-2009).....	4
Table 4. Moose-Vehicle Collision Rankings 2001-2005 & Distance from the Study Area.....	7
Table 5. High Crash Locations Crash Type Summary from January 2000 to December 2009	8

List of Figures

Figure 1. Study Area Crash Rate per Milepost from January 2000 to December 2009	2
Figure 2. Crash type within the project area between 2000 and 2009	5
Figure 3. Map showing the location and number of crashes caused by moose within the Study Area between 2000 and 2009.....	8
Figure 4. Comparison of the proportional severity of crashes statewide and within the project area.....	10

SECTION 1 INTRODUCTION

1.1 Overview

This report analyzes Alaska Department of Transportation & Facilities (DOT&PF) crash data for milepost (MP) 45 to 60 of the Sterling Highway (Study Area). A map of the Study Area is provided in Appendix A. This report provides technical support for the Sterling Highway Milepost 45 to 60 Supplemental Environmental Impact Statement (SEIS) that is currently being prepared by the DOT&PF.

1.2 Crash Analysis Data and Methodology

Crash analysis was performed through evaluation of historical crash data (2000–2009) for MP 45 to 60 of the Sterling Highway, and comparing the Study Area crash evaluation to the State as a whole. A qualitative analysis is also provided relative to other stretches of the Sterling Highway. These data were used to assess the relative crash rate, identify locations with the highest concentration of crashes, ascertain which crash types are most common, and determine the major factors causing crashes within the Study Area (Sterling Highway MP 45 to 60).

Crash data for the Study Area, the entire Sterling Highway, and statewide was obtained from DOT&PF for the most recently available 10 year period (January 2000 through December 2009). The crash data included crash location and severity, in addition to other crash characteristics such as the cause of the crash and roadway conditions. Average daily traffic within the Sterling Highway Study Area was taken from the DOT&PF Central Region Annual Traffic Volume Report for 2000 to 2009, which represents an average of four locations within the Study Area, and moose-vehicle collision data were provided by the DOT&PF.

SECTION 2 STUDY AREA CRASH DATA

This section of the report provides the crash data, including crash rate, seasonal crash rate, and crash injury severity, for the Study Area (Sterling Highway MP 45 to 60).

2.1 Crash Rate Description

The crash rate of a roadway segment is determined by calculating how many crashes exist per million vehicles per mile within the corridor (CPMVM). To calculate the CPMVM, the following information was used: the number of vehicles that use the highway on an average day, the length of the corridor, the number of days during the study period, and the number of crashes that have occurred during the study period. The formula for computing the crash rate on a roadway segment is as follows:

$$\frac{\text{(Total Crashes Within the Study Period)} \times (1,000,000 \text{ Vehicle Miles})}{\text{(Number of Days in Study Period)} \times \text{(Distance of Corridor in Miles)} \times \text{(Average Daily Traffic)}}$$


$$\text{(Number of Days in Study Period)} \times \text{(Distance of Corridor in Miles)} \times \text{(Average Daily Traffic)}$$

The CPMVM was calculated using crash data from January 1, 2000 to December 31, 2009. To determine the CPMVM, the number of crashes during the study period was multiplied by one million vehicle miles and then divided by the: number of days in the study period, the distance of the corridor, and the average daily traffic.

2.2 Study Area Crash Rate

Within the 15-mile Study Area, 303 crashes occurred between January 1, 2000 and December 31, 2009. The average daily traffic (ADT) on the Sterling Highway during that period was 3,220 vehicles per day.¹ Based on this information, the average crash rate for the corridor was determined to be 1.72 CPMVM. For comparison, the statewide average crash rate for rural primary highways is 1.80. Figure 1 illustrates the 10-year Average Crash Rate by Milepost. Note that the crash rates shown by milepost may not be indicative of where problem areas actually exist within the Study Area.

Figure 1. Study Area Crash Rate per Milepost from January 2000 to December 2009

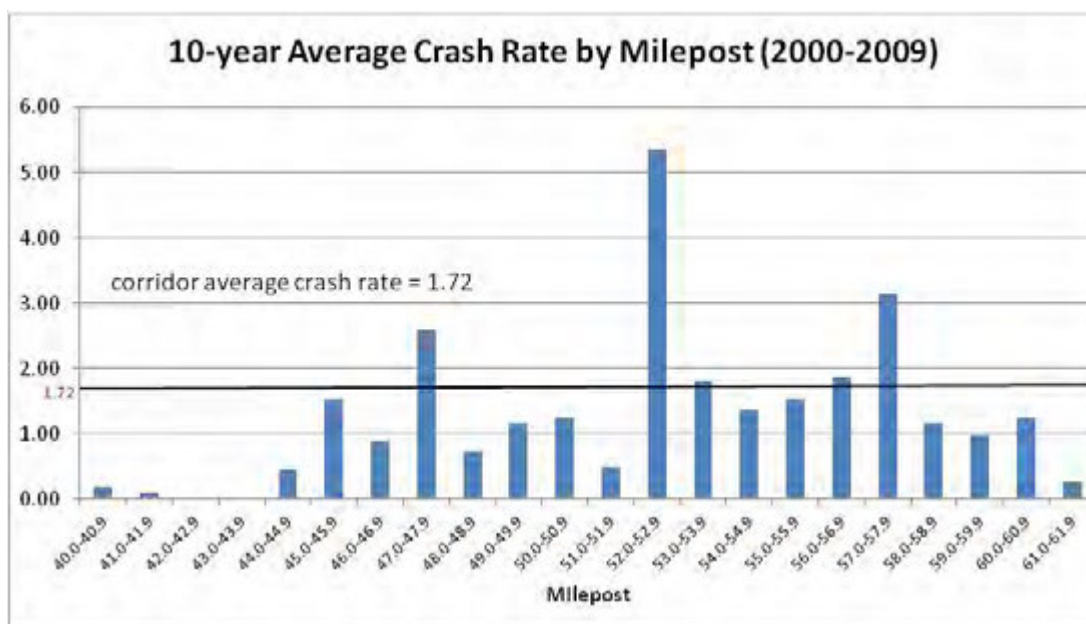

2.3 Study Area Seasonal Crash Rate

Crash occurrences on a roadway can vary greatly depending on the season. Although the crash rate computed for the entire year is the measure that is primarily used in this report, it is important to note the crash rate for both the winter and summer seasons in order to understand and address the whole crash potential for the roadway.

For this traffic safety analysis, winter was considered to be the five-month period between November and March, while summer was considered to be the seven-month period between April and October. Between January 1, 2000 and December 31, 2009, there was a winter ADT of 1,635 vehicles and a summer ADT of 4,353 vehicles. The winter and summer crash totals for the Study Area over the 10-year period were 153 and 150 crashes, respectively (Table 1). Although there was less traffic between November and March, there tended to be more crashes during the winter months, when snow and ice were likely present and darkness more prevalent.

¹ The average daily traffic (ADT) used to compute the accident rate was taken from the Alaska DOT Central Region Annual Traffic Volume Report for 2000 to 2009. This figure represents the average ADT for four locations within the Study Area.

Table 1. Study Area Seasonal Crash Rate

Season	Crash Rate (CPMVM)
Winter (Nov. – Mar.)	4.13
Summer (Apr. – Oct.)	1.07

2.4 Study Area Crash Injury Severity (Year-round)

Table 2 (and Appendix B: Table 1) shows the general severity of crashes and the number of different injury types experienced across the Study Area between 2000 and 2009.

Table 2. Study Area Crash and Personal Injury Summary from January 2000 to December 2009

	Crashes				Crash Rate ^a	Statewide Average Rate ^b	Percent above/below the Statewide Average
	Fatal	Injury	Property Damage Only	Total			
Segment 1 (MP 44.5 - 46.59)	0	16	18	34	1.53	1.80	-17.6%
Segment 2 (MP 46.6 - 47.79)	1	4	19	24	1.38	1.80	-30.4%
Segment 3 (MP 47.8 - 49.39)	1	11	11	23	1.31	1.80	-37.4%
Segment 4 (MP 49.40 - 51.29)	1	9	18	28	1.25	1.80	-44.0%
Segment 5 (MP 51.3 - 55.09)	1	34	75	110	2.46	1.80	+26.8%
Segment 6 (MP 55.1 – 58.2)	0	27	50	77	2.38	1.80	+24.7%
Total	4	101	191	296			

Notes:

^a The crash rate is the number of crashes per million vehicle miles.

^b The Statewide average rate is for rural primary highways.

Source: *2009 Alaska Traffic Crashes*, June 2012, Alaska Department of Transportation and Public Facilities
http://www.dot.alaska.gov/stwdplng/transdata/pub/accidents/2009_AK_CrashData.pdf

From Figure 50, the “rural other principal arterial” statewide crash rate is 1.80.

Crashes where a fatality was involved require additional investigation to identify conditions that could be rectified to improve safety. There were five fatal crashes that occurred within the Study Area between 2000 and 2009. Appendix B: Table 3 describes each fatality in more detail. Of the five fatal crashes, four were head-on crashes and one was a fixed-object crash.

- **Causes of the Fatal Head-On Crashes:** Two of the head-on crashes were caused by the driver being under influence of alcohol, with one driving at an unsafe speed and the other driving on the wrong side of road. The third head-on crash was caused by a driver who fell asleep behind the wheel, and the fourth was caused by a driver speeding during snow conditions. Therefore, all of the four fatal, head-on crashes were the result of driver behavior.
- **Causes of the Fatal Fixed-Object Crash:** The other fatal crash in the Study Area was a fixed-object crash. This crash, also the result of the driver being under the influence of alcohol and driving at an unsafe speed. The vehicle, traveling above the speed limit, overturned, and crashed into the culvert on the roadway shoulder.

SECTION 3 ANALYSIS OF CRASH RATES, LOCATIONS, AND TYPES

This section presents an analysis of crash data for the Study Area. The purpose of Section 3 is to reveal trends, provide comparisons, and understand current crash data for MP 45 to 60.

3.1 Crash Rate by Milepost

There were three locations that had a much higher crash rate than the Study Area average. Table 3 provides the CPMVM from 2000 to 2009 for three milepost segments of the Study Area that had the highest concentration of crashes. Note that the crash rates for these mileposts may not be indicative of where problem areas actually exist within the Study Area. These three segments will be analyzed in further detail. See Appendix B: Table 1 for more information. A description of each milepost segment is provided below. For comparison, the CPMVM for MP 37- 45 is also provided in Table 3.

Table 3. Top Study Area and Adjacent Segment Crash Locations (2000-2009)

MP	Average Crash Rate (CPMVM)
47.0-47.9	2.58
52.0-52.9	5.35
57.0-57.9	3.13
Total (45-60)	1.72
MP 37-45	1.15

- MP 47.0 – 47.9 – This segment includes the Cooper Landing Visitor Cabin (MP 47.6), Bean Creek Road (47.7), and Snug Harbor Road (47.9), all of which include intersections and are more heavily populated sections of the highway.
- MP 52.0 – 52.9 – This segment is from Gwin’s Lodge and MP 52.9. Gwin’s Lodge is comprised of 14 cabins, a restaurant, and a tackle shop. The lodge is the closest accommodation to a world-class fishing spot, the confluence of the Kenai River and Russian River. Although the lodge is a popular destination for locals and tourists alike, it is only open May through September. Only 29 percent of the crashes on this segment between 2000 and 2009 were during the lodge’s open season. This implies that root cause of the high frequency of crashes at this

location goes beyond just the high traffic volume associated with operation of the lodge and may be more related to roadway geometry. The curve at MP 52 was upgraded in 2007 and 2008. As 2009 is the last year of the data set, there is not enough data to determine the overall effectiveness the upgrades have on crash reductions.


- MP 57 – 57.9 – This segment is from Fuller Lake Trail Head and MP 57.9. It is possible that the higher frequency of crashes at this location may be associated with more people wanting to stop, stay for extended periods of time, and park.

It is likely that the higher crash rates associated with these three Study Area segments are due in part to the fact that they are locations that draw more traffic, have more intersections, and promote stopping and prolonged stays. Further analysis of the crashes that occurred at these key locations is discussed in Section 3.4. It should be noted that this corridor received HSIP signing and delineation in 2007-2008. However, there has not been enough data collected after these improvements to provide any statistically relevant comparisons.

3.2 Study Area Crash Type

Between 2000 and 2009, there were a wide variety of crash types, such as: run-off-the-road and fixed-object (e.g. ditches, culverts, and embankments) crashes; head-on, rear-end, and angle collisions; and moose-related crashes (Appendix B: Table 2). Figure 2 illustrates the percentages of crash types within the Study Area during our analysis period. Further description of the common crash types is presented below.

Figure 2. Crash type within the project area between 2000 and 2009

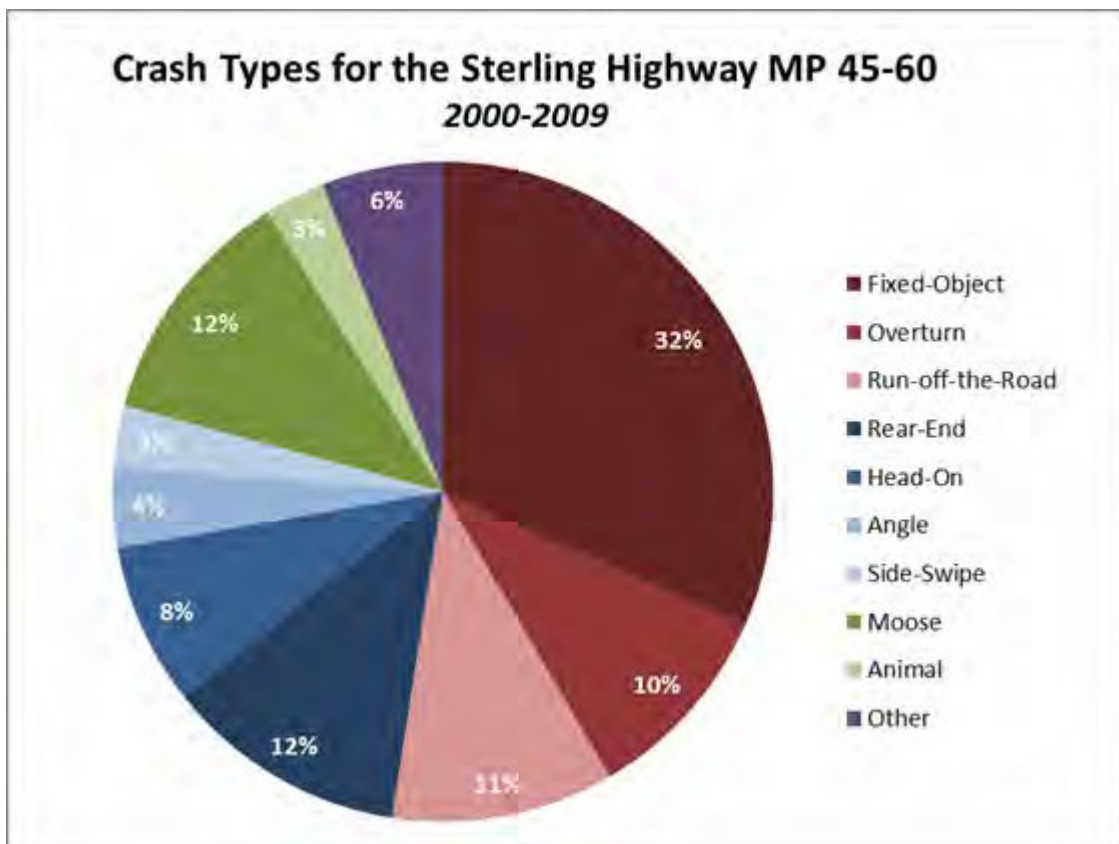

3.2.1 Fixed-Object/ Overturn/Run-Off-The-Road Crashes

Summary: The majority of corridor crashes involved fixed-objects, vehicle overturns, and vehicles running off of the road. Such crashes comprised 53 percent of the total crashes between 2000 and 2009 (Figure 2). Ditches and culverts were two of the most common fixed-objects involved in crashes, with nearly 20 percent of the total crashes in 2009 involving ditches and culverts.

The large percentage of crashes caused by ditches and culverts reflects the greater trend of non-traffic-lane crashes, whether it is cars running off the road or crashing into ditches, culverts, embankments, or guardrails (Figure 3). Of the 303 crashes that occurred within the project area between 2000 and 2009, 31 occurred on a shoulder, 21 occurred on the roadside, and 39 occurred outside of the traffic-way, in total comprising 30 percent of the total crashes.

Cause: Fixed-object/overturn/run-off-the-road crashes commonly result from drivers losing control. This is often the result of: road conditions, excessive speed, close proximity of roadside barriers to moving traffic, or avoidance of other traffic. Often, such crashes are the result of driver behavior or impairment (i.e., fatigue, illness, or under influence of alcohol). The following roadway conditions can contribute to the occurrence of such crashes within the Study Area: roadway design, pavement condition, narrow roadway shoulders, and proximity of guardrail barriers to the roadway. Fixed-object/overturn/run-off-the-road crashes that occurred at high crash locations within the Study Area are evaluated in Section 5 to identify the most relevant roadway conditions.

3.2.2 Vehicle Rear-End, Head-On, and Angle Crashes

Summary: Vehicle rear-end, head-on, and angle crashes comprised 24 percent of the total crashes between 2000 and 2009. Only 15 percent of the total corridor crashes were congestion-related, and these were typically rear-end and sideswipe incidents. Within the Study Area, rear-end and sideswipe crashes represented 12 percent and three percent of the total crashes, respectively (AKDOT, MP 45-60, 2000-2009).

Head-on crashes comprised eight percent of the crashes in the Study Area between 2000 and 2009. While the percentage of head-on crashes is lower than other crash types, collision density maps from 2001-2008 (DOT&PF 2010) suggest that MP 45 to 58 is a high head-on crash location compared to other portions of the highway. Due to the fact that MP 45 to 58 maintained a rate of two or more head-on crashes per mile between 2001 and 2007, the State is concerned about the safety of this stretch of roadway. The AKDOT Central Region Traffic Department suggested that efforts be made to mitigate this crash type within the project corridor by using a variety of “Crash Modification Factors” (DOT&PF 2012). These efforts consist of installing 6-inch striping and narrower lanes in an effort to increase speed zone compliance.

Cause: Many of the vehicle rear-end, head-on, and angle crashes were the result of driver behavior or impairment (i.e., speeding, driver inattention, failure to yield, or improper lane change/passing). Of the 24 head-on crashes that occurred between 2000 and 2009, over 17 resulted from driver behavior or impairment. In addition, over eight of the 13 angles crashes that occurred in the Study Area were the result of driver behavior or impairment.

3.2.3 Moose-Related Crashes

Summary: There were 36 moose-related crashes in the Study Area between 2000 and 2009, representing 12 percent of the total crashes. Moose pose a safety concern within the project area, especially if traffic demand increases over time. Table 4 summarizes data procured from the Central Region Department of the DOT&PF’s Moose-Vehicle Collision Rankings 2001-2005 (the latest data available). The purpose of showing this data is to reveal highway segments close to the Study Area that

have undergone mitigation as a result of their high frequency of moose-related collisions. Areas of roadway that are within the 95th percentile have may have undergone mitigation such as: off-site habitat/corridors, lighting, fencing, vegetation management, and at-grade warnings. Conversely, areas of roadway that are within the 75th percentile are may have undergone mitigation such as: improved brushing, vegetation management, signing, and winter trails (DOT&PF 2012). Mitigation for moose-related crashes is addressed on a case-by-case basis as funding allows.


Table 4. Moose-Vehicle Collision Rankings 2001-2005 & Distance from the Study Area²

Roadway MP	Threshold Used and Rank	Recorded Collisions per Year	Average Collisions per Mile per Year	Distance from Project Area
Sterling Hwy MP 67.3-74.6	75 th Percentile #27	5.2	0.7	~7.3 miles
Sterling Hwy MP 83-118.4	75 th Percentile #2	47.2	1.4	~23 miles
Sterling Hwy MP 87.8-93.3	95 th Percentile #1	18.6	3.5	~30 miles
Sterling Hwy MP 116.4-118.2	95 th Percentile #15	2.4	1.5	~57 miles
Sterling Hwy MP 123.1-134.1	75 th Percentile #21	6.6	0.6	~63 miles
Sterling Hwy MP 128-129	95 th Percentile #19	1.0	1.0	~68 miles
Sterling Hwy MP 133-134	95 th Percentile #18	1.4	1.4	~73 miles
Sterling Hwy MP 163.3-164.8	75 th Percentile #29	1.8	1.2	~103.3 miles

A frequency of 8 crashes per mile per year places a stretch of roadway in the 75th percentile (under the threshold moose-vehicle collision values established in 1995, DOT&PF 12/5/03 Memo). Figure 4 shows the number of moose-related collisions between 2000 and 2009 that occurred within the Study Area (recorded to the nearest milepost). The mile segment with the highest number of crashes was MP 57 to 57.9, which experienced eight moose crashes between 2000 and 2009. The mile segment with the second highest number of crashes during that timeframe was MP 54 to 54.9, which experienced five crashes. While none of the one-mile segments within the Study Area currently fall within the 75th percentile, the correlation between the number of moose collisions and increases in traffic make it plausible that the threshold could be met in the future as traffic levels rise (Appendix C: Figure 2).

² The 75 percent and 95 percent thresholds are used to determine the level of mitigation suggested to reduce moose crashes. The numerical ranking of each stretch within the 75 percent and 95 percent threshold, respectively, is based upon crash density per mile and crash rate per million vehicle miles (CPMVM).

Figure 3. Map showing the location and number of crashes involving moose within the Study Area between 2000 and 2009

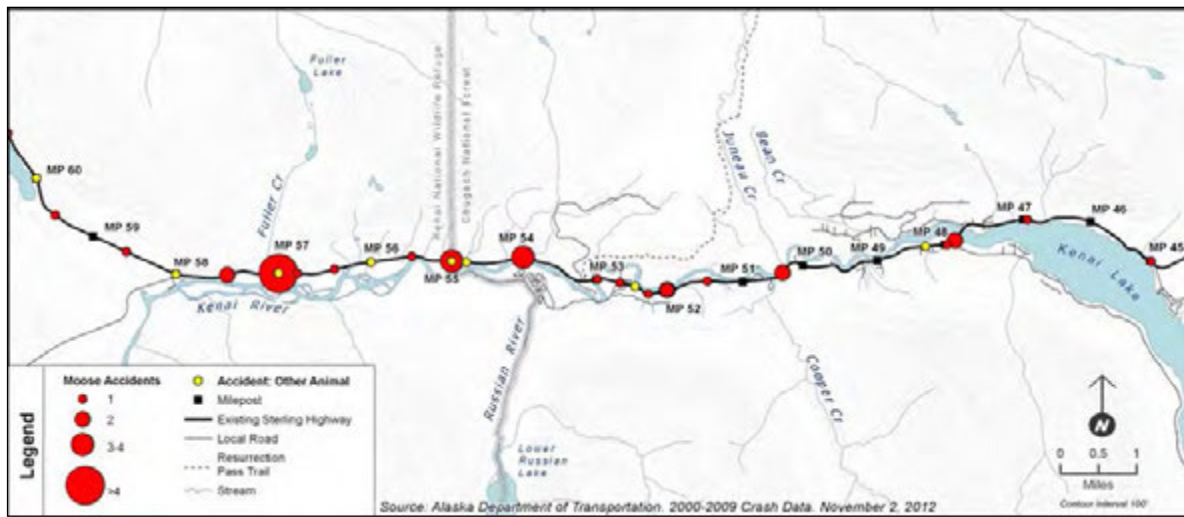

3.3 High Crash Locations

As presented in Section 3.3, the highest concentration of crashes occurred within segments MP 47.0 to 47.9, MP 52.0 to 52.9, and MP 57.0 to 57.9. Table 5 shows the number of each crash type that occurred at each high crash location.

Table 5. High Crash Locations Crash Type Summary from January 2000 to December 2009

MP	Total Crashes	Fixed-Object/ Overturn/Run- Off-The-Road	Rear-End	Head-On	Angle	Side-Swipe	Animal/Moose	Other
47.0-47.9	32	10	10	3	3	1	3	2
52.0-52.9	65	43	4	5	0	3	6	4
57.0-57.9	35	22	2	2	0	0	9	0

3.3.1 Analysis of MP 52.0 to 52.9

MP 52.0 to 52.9 includes the location of Gwin’s Lodge (MP 52.0) and Gwin’s Corner (approximately MP 52.3). MP 52.0 to 52.9 experienced 65 crashes over the 10-year time period. At Gwin’s Corner, the roadway makes a relatively sharp horizontal curve, resulting in a design speed that is lower than the posted speed limit on the approaching roadways (45 miles per hour). At MP 52, wig wag beacons and large warning signs were added in 2007-2008. At least 43 of the 65 crashes that occurred along this one-mile stretch of roadway (66 percent) occurred on a horizontal curve. Forty-three of the 65 crashes also involved vehicles losing control, leaving the roadway, or crashing into ditches, culverts, embankments, or guardrails. Crashes between vehicles (which include rear-end, head-on, and side-swipe crashes) represented 19 percent of the total crashes. In addition, crashes between vehicles and animals, such as moose, represented another nine percent of the crashes that occurred between MP 52.0 and 52.9

3.3.2 Analysis of MP 57.0 to 57.9

MP 57.0 to 57.9, near the location of the Fuller Lake Trail Head, had the second highest crash rate. Thirty-five crashes occurred at this location between 2000 and 2009. At least 21 of the 35 crashes (60 percent) took place on a horizontal curve in the roadway. Twenty-seven of the 35 crashes (77 percent) occurred while snow or ice was present on the roadway or the pavement was wet. Twenty-two of the 35 crashes (63 percent) involved vehicles: losing control, leaving the roadway, or crashing into ditches, culverts, embankments, or guardrails. In addition, crashes that involved non-fixed objects, such as other vehicles or animals, represented another 26 percent of crashes within this section. There were two head-on crashes and two rear-end crashes that occurred over the 10-year period, representing 12 percent of the total number of crashes.

Along this stretch of the highway, the road has very narrow shoulders and a 6- to 8-inch drop-off from the edge of the pavement. Such a drop-off could cause a vehicle to roll when a driver is was taking corrective action or even pull a vehicle into the ditch once a tire is was off the pavement.

3.3.3 Analysis of MP 47.0 to 47.9

The segment between MP 47.0 and Snug Harbor Road (MP 47.0 to 47.9) includes the Cooper Landing Visitor Cabin (MP 47.6), the Bean Creek Road intersection (MP 47.7), and Snug Harbor Road intersection (MP 47.9). Thirty-two crashes occurred on this segment over the 10-year period. Five crashes occurred at the Cooper Landing Visitor Cabin (MP 47.6), seven crashes occurred at the Bean Creek Road intersection (MP 47.7), and seven crashes occurred at the Snug Harbor Road intersection (MP 47.9). In total, 10 of the 32 crashes (31 percent) were rear-end crashes that occurred while cars were queued to make a left turn onto side streets. Another 31 percent of the crashes were fixed-object/overturn/run-off-the-road crashes that involved vehicles losing control, leaving the roadway, or crashing into ditches, culverts, embankments, or guardrails.


Four of the seven crashes located at the Bean Creek Road intersection (MP 47.7) were rear-end crashes that occurred while cars were queued to make a left turn onto Bean Creek Road. The two angle crashes that occurred were both the result of eastbound traffic trying to make a left turn onto Bean Creek Road. One of the angle crashes was caused by an eastbound, left-turn vehicle failing to yield to the through-traffic from the other direction. The other angle crash was the result of an eastbound, through-vehicle that improperly passed an eastbound-vehicle that was waiting to make a turn onto Bean Creek Road. The only head-on crash was caused by a driver speeding during snow conditions.

3.4 Comparison of Crash Severity within the Study Area, the Entire Sterling Highway, and Statewide³

Figure 4 shows that in addition to having more crashes per vehicle mile than the average state roadway, the crashes within the Study Area also tended to be slightly more severe, on average. Excluding the year 2006, MP 45 to 60 of the Sterling Highway had consistently fewer property damage and minor injury (non-incapacitating injury/possible injury) crashes and a higher proportion of major injury (incapacitating injury) and fatality crashes between 2000 and 2009. Also, during four of the ten years shown (2002, 2003, 2004, and 2007) the Study Area had a higher percentage of fatalities than the statewide average (Figure 4).

³ It should be noted that the crash rate given for the entire state was based on crash data for all State-owned roadways, which includes a variety of road types.

Figure 4. Comparison of the proportional severity of crashes statewide and within the project area

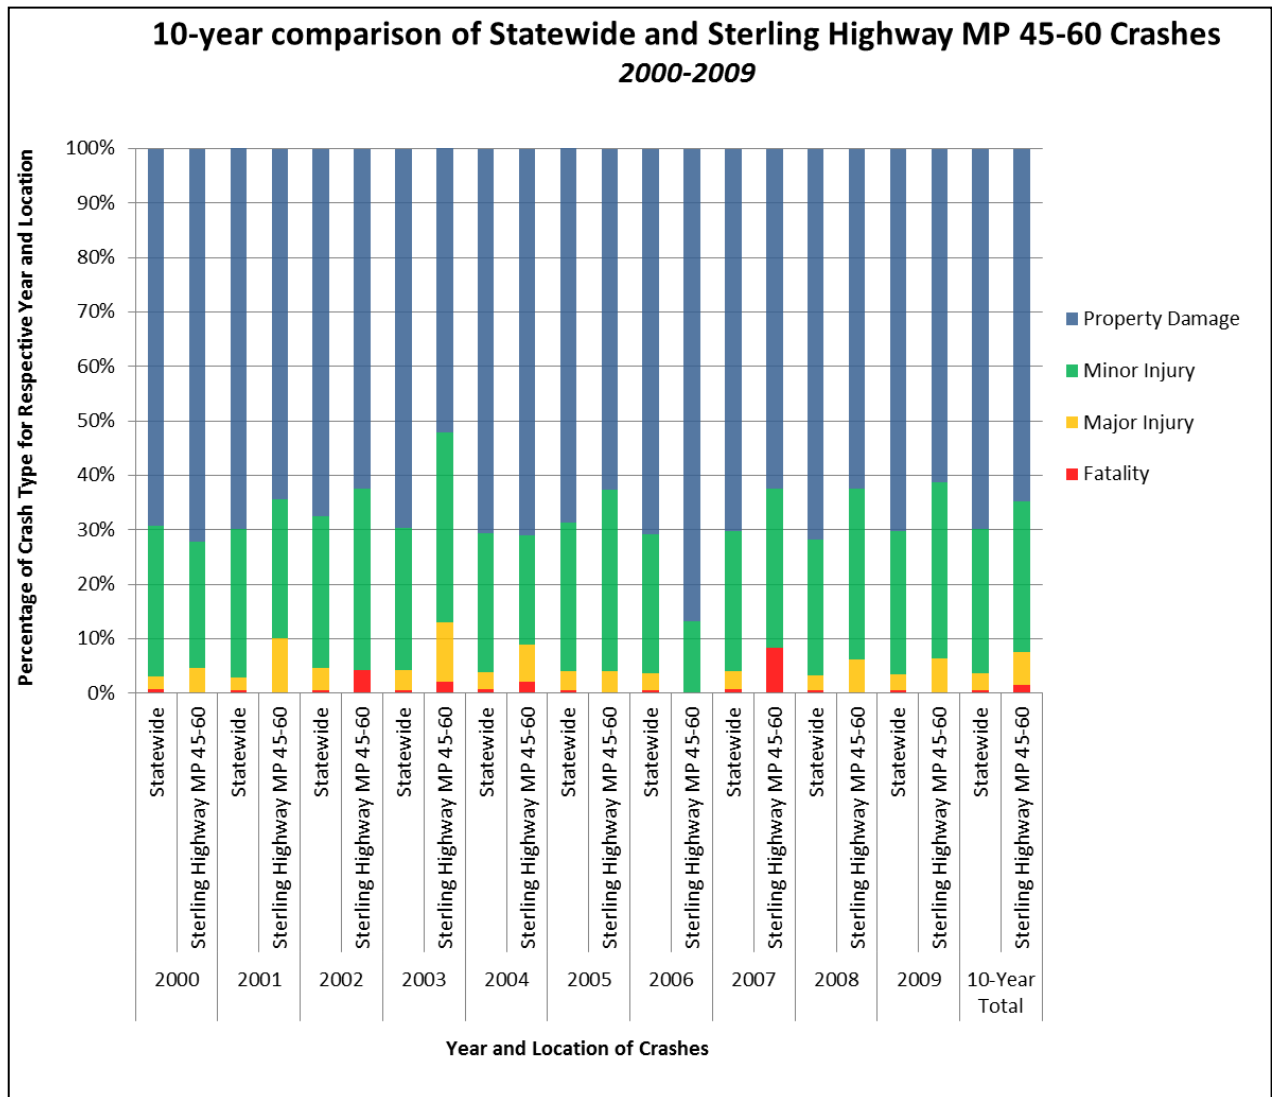

3.5 Comparison of Unimproved and Improved Sections of the Sterling Highway

The Sterling Highway was originally constructed in the 1950s. Since then, few improvements have been made to update the road to meet current safety standards and to accommodate larger traffic volumes. The easternmost segment of the Sterling Highway (MP 37 to 45) was reconstructed approximately 12 years ago to improve the roadway geometry. Milepost segment 37 to 45 had similar roadway geometry to the existing conditions in the Study Area prior to the roadway improvements. As indicated in Section 3.1, the improved section of Sterling Highway MP 37 to 45 has a lower CPMVM (1.15) than the Study Area (1.72). While improved road conditions likely contribute to this difference, it is important to note that there are many other variables that also potentially play a role and that safety performance can vary according to the unique characteristics of each segment. For instance, MP 45 to 60 encompasses Cooper Landing and the higher number of driveways, side roads, and concentration of short trips that are associated with the community. While these conditions predispose the MP 45 to 60

segment to being less safe, updating the roadway to better accommodate such safety challenges has the potential to positively impact traffic safety within the Study Area.

SECTION 4 SUMMARY OF FINDINGS

MP 45 to 60 was found to have more crashes per vehicle mile than the average state roadway. Although the Study Area had fewer crashes per MVM than other sections of the Sterling Highway, its year-round crash rate (1.72 CPMVM) and frequency of injuries (1.5 injuries per mile) was found to be higher than MP 37-45, which is an improved section of the highway.

Between 2000 and 2009, there were a wide variety of crash types, such as: run-off-the-road and fixed-object (e.g. ditches, culverts, and embankments) crashes; head-on, rear-end, and angle collisions; and moose-related crashes. The majority of crashes within the Study Area were fixed-object/overtake/run-off-the-road crashes, accounting for 53 percent of the crashes. Rear-end, head-on, and angle crashes accounted for 12, eight, and four percent of the crashes respectively, while 12 percent of crashes were moose-related.

Between 2000 and 2009, there were five fatal crashes, 20 major injury crashes, and 85 minor injury crashes that occurred within the Study Area. These resulted in five fatalities, 22 major injuries, and 137 minor injuries. Of the five fatal crashes, four were head-on crashes and one was a fixed-object crash. All five of the fatal crashes were the result of driver behavior (e.g. fatigue, under influence of alcohol, or speeding), and therefore none of them was necessarily preventable from a roadway design standpoint.

The highest concentration of crashes occurred within the following sections: MP 52.0 to 52.9, MP 57.0 to 57.9, and MP 47.0 to 47.9.


REFERENCES

- Alaska Department of Transportation and Public Facilities. “1997-2007 Crashes in Top 5 Traffic Safety Corridors and Statewide,” a table on the DOT&PF Safety web page. Web. <http://www.dot.state.ak.us/highwaysafety/assets/pdf/1997-2007_Sfty_Crdr_CrashesSummary.pdf>.
- Alaska Department of Transportation and Public Facilities. *DOT&PF Central Region Annual Traffic Volume Report for 2000 to 2009*.
- Alaska Department of Transportation and Public Facilities. Sterling Highway: MP 37 to MP 96 2001-2008 Fatal Major Injuries Crashes Diagram. 3 March 2010.
- Alaska Department of Transportation and Public Facilities. Unpublished 2000-2009 Crash Data provided by DOT&PF. 2 Nov 2012.
- Alaska Department of Transportation and Public Facilities. Thomas, Scott. E-mail Interview Nov. 6, 2012, between Katherine Wood of HDR Alaska, Inc., and Thomas, DOT&PF Central Region Safety (Central Region Traffic Engineer).
- Alaska Department of Transportation. Thomas, Scott. *Safety Corridors in Alaska*.
<<http://www.westernite.org/annualmeetings/alaska11/Compendium/Moderated%20Session%20Papers/3D-Scott%20E.%20Thomas.pdf>> Accessed Oct. 3, 2013.

APPENDIX A

MAP 1 STUDY AREA

This page intentionally left blank.

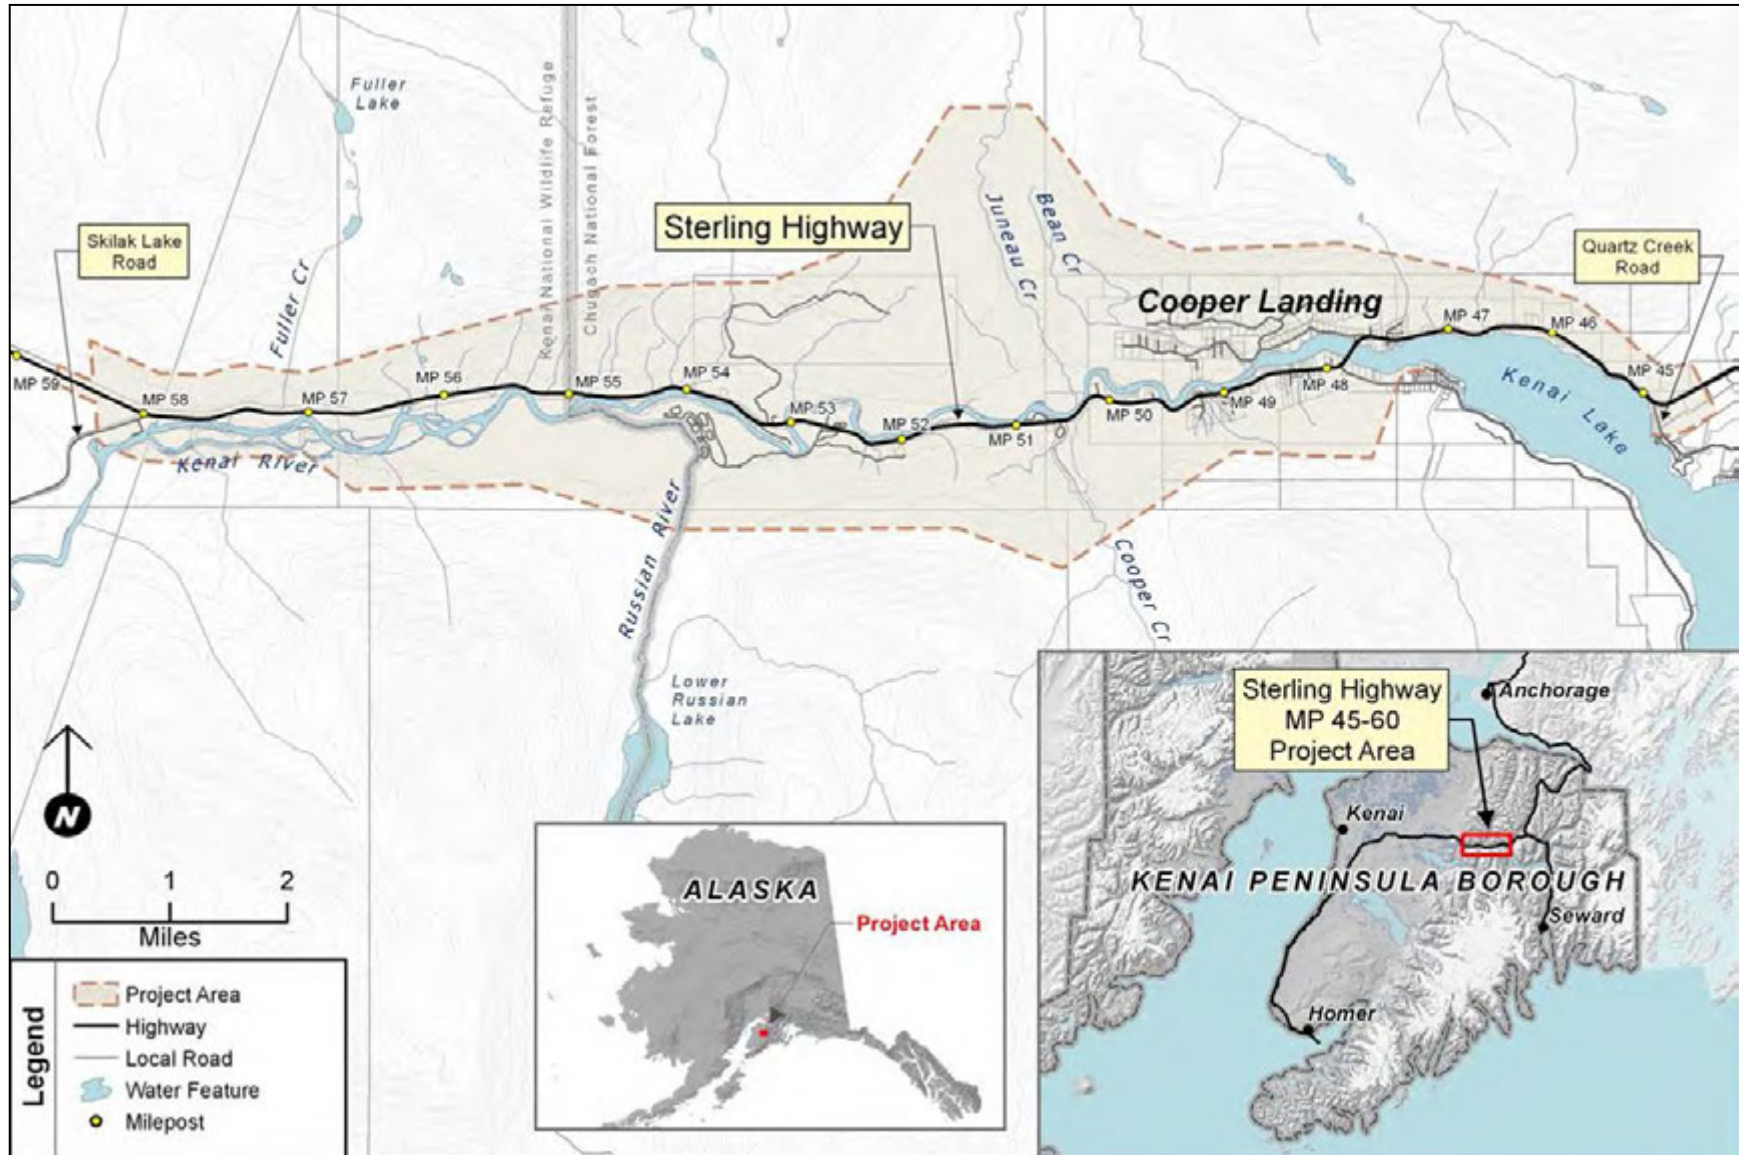

Map 1. Study Area and Alternatives

This page intentionally left blank.

APPENDIX B: TABLES

TABLE 1 STERLING HIGHWAY CRASH SUMMARY PER MILEPOST FOR THE PAST 10 YEARS

TABLE 2 STERLING HIGHWAY CRASH TYPE SUMMARY PER MILEPOST FOR THE PAST TEN YEARS

TABLE 3 DESCRIPTION OF FATAL CRASHES WITHIN THE STUDY AREA (2000-2009)

This page intentionally left blank.

Table 1. Sterling Highway Crash Summary per Milepost for the Past Ten Years

Crash Summary for Sterling Highway per Milepost from January 2000 to December 2009										
	Total	Fatal		Major		Minor		PDO	2000-2009	
MP	Crashes	# of crashes	# of fatalities	# of crashes	# of injuries	# of crashes	# of injuries	# of crashes	Average AADT	Average Crash Rate
40.0-40.9	2							2	3012	0.18
41.0-41.9	1							1	3012	0.09
42.0-42.9	0								3012	0.00
43.0-43.9	0								3012	0.00
44.0-44.9	5					1	1	4	3012	0.45
45.0-45.9	19			1	1	9	9	9	3403	1.53
46.0-46.9	11			1	1	4	6	6	3403	0.89
47.0-47.9	32	2	2	1	1	4	8	25	3403	2.58
48.0-48.9	9			2	2	4	6	3	3328	0.74
49.0-49.9	14			3	3	6	10	5	3328	1.15
50.0-50.9	15	1	1	1	1	1	1	12	3328	1.23
51.0-51.9	6					3	5	3	3328	0.49
52.0-52.9	65			1	1	18	27	46	3328	5.35
53.0-53.9	20	1	1	2	3	6	10	11	3027	1.81
54.0-54.9	15			2	2	2	4	11	3027	1.36

Crash Summary for Sterling Highway per Milepost from January 2000 to December 2009 (cont'd.)										
	Total	Fatal		Major		Minor		PDO	2000-2009	
MP	Crashes	# of crashes	# of fatalities	# of crashes	# of injuries	# of crashes	# of injuries	# of crashes	Average AADT	Average Crash Rate
55.0-55.9	17			2	2	1	6	14	3062	1.52
56.0-56.9	21					6	9	15	3062	1.88
57.0-57.9	35			1	1	16	24	18	3062	3.13
58.0-58.9	13			2	3	2	5	9	3090	1.15
59.0-59.9	11	1	1	1	1	3	7	6	3090	0.98
60.0-60.9	14					2	3	12	3090	1.24
61.0-61.9	3					1	1	2	3090	0.27
MP45-MP60 Total	303	5	5	20	22	85	137	193	3220	1.72

Table 2. Sterling Highway Crash Type Summary per Milepost for the Past Ten Years

Crash Type Summary for Sterling Highway per Milepost from January 2000 to December 2009

MP	Total Crashes	Rear-Ends	Head On	Angles	Side-Swipe	Fixed Objects	Over Turn	Ran-off Road	Animal	Moose	Others
40.0-40.9	2			1						1	
41.0-41.9	1							1			
42.0-42.9	0										
43.0-43.9	0										
44.0-44.9	5					3	1				1
45.0-45.9	19				1	13	2	1		1	1
46.0-46.9	11	1	1	2	1	3	2				1
47.0-47.9	32	10	3	3	1	6	2	2		3	2
48.0-48.9	9	2	1	1		3			1	1	
49.0-49.9	14	3	1	1		6		3			
50.0-50.9	15	2	5		2	2		1		2	1
51.0-51.9	6			1		2		2		1	
52.0-52.9	65	4	5		3	22	10	11	2	4	4
53.0-53.9	20	3	3			5	2	4		1	2
54.0-54.9	15	2	1			3	1	2	1	5	
55.0-55.9	17	1		1		4	2	2	1	4	2
56.0-56.9	21	3		2		7	1	2	1	3	2

Crash Type Summary for Sterling Highway per Milepost from January 2000 to December 2009

MP	Total Crashes	Rear-Ends	Head On	Angles	Side-Swipe	Fixed Objects	Over Turn	Ran-off Road	Animal	Moose	Others
57.0-57.9	35	2	2			14	6	2	1	8	
58.0-58.9	13	2	1			4	1	1	1	2	1
59.0-59.9	11		1	2		4	1	1		1	1
60.0-60.9	14			1		7	2	1	1	1	1
61.0-61.9	3					2			1		
MP45-MP60 Total	303	35	24	13	8	98	30	34	8	36	17
Crash Type Percentage	100%	12%	8%	4%	3%	32%	10%	11%	3%	12%	6%

Table 3. Description of Fatal Crashes within the Study Area (2000-2009)

Fatal Crash #	Description
1	A head-on collision that took place at MP 47.7 on January 8, 2004 at the intersection of Sterling Highway and Bean Creek Road. It was on a roadway curve during daylight hours with snow on the pavement. This was caused by excessive driver speed during snow conditions. Vehicle 1 was moving too fast for conditions, lost traction, out of control and crashed head-on into vehicle 2, which was traveling in the opposite direction. This crash caused one fatality and one minor injury.
2	A fixed-object collision that took place at MP 47.9 on June 4, 2002 at the intersection of Sterling Highway and Snug Harbor Road. It was during twilight hours on the dry pavement. The police report stated the driver was under influence of alcohol and drove at an unsafe speed. The vehicle was moving too fast, overturned, out of control and crashed into the culvert on the roadway shoulder. This crash caused one fatality and one minor injury.
3	A head-on collision that took place at MP 50.5 on August 28, 2003. It was during daylight hours on the dry pavement. The driver in vehicle 1 fell asleep. Vehicle 1 was out of control and crashed head-on into vehicle 2, which was traveling in the opposite direction. This crash caused one fatality.
4	A head-on collision that took place at MP 53.5 on July 26, 2007. It was on a dark roadway curve without lightings on the dry pavement. The police report stated the driver was under influence of alcohol, drove on the wrong side of roadway, and crashed head-on into vehicle 2 which was traveling in the opposite direction. This crash caused one fatality and one major injury.
5	A head-on collision that took place at MP 59.5 on May 19, 2007. It was during daylight hours on dry pavement. The police report stated the driver was under influence of alcohol and drove at an unsafe speed. The vehicle was moving too fast, lost traction, out of control, and crashed head-on into vehicle 2 which was traveling in the opposite direction. This crash caused one fatality and one minor injury.

This page intentionally left blank.

APPENDIX C: FIGURES

FIGURE 1 GRAPH COMPARING THE NUMBER OF CRASHES PER VEHICLE MILE EXPERIENCE WITHIN DIFFERENT SECTIONS OF THE STERLING HIGHWAY IN 2009

FIGURE 2 GRAPH SHOWING CORRELATION BETWEEN INCREASES IN TRAFFIC VOLUME AND THE NUMBER OF MOOSE COLLISIONS ON TWO-LANE ROADS AT LOW ELEVATIONS (LESS THAN 200FT) (SCOTT THOMAS, AKDOT)

This page intentionally left blank.

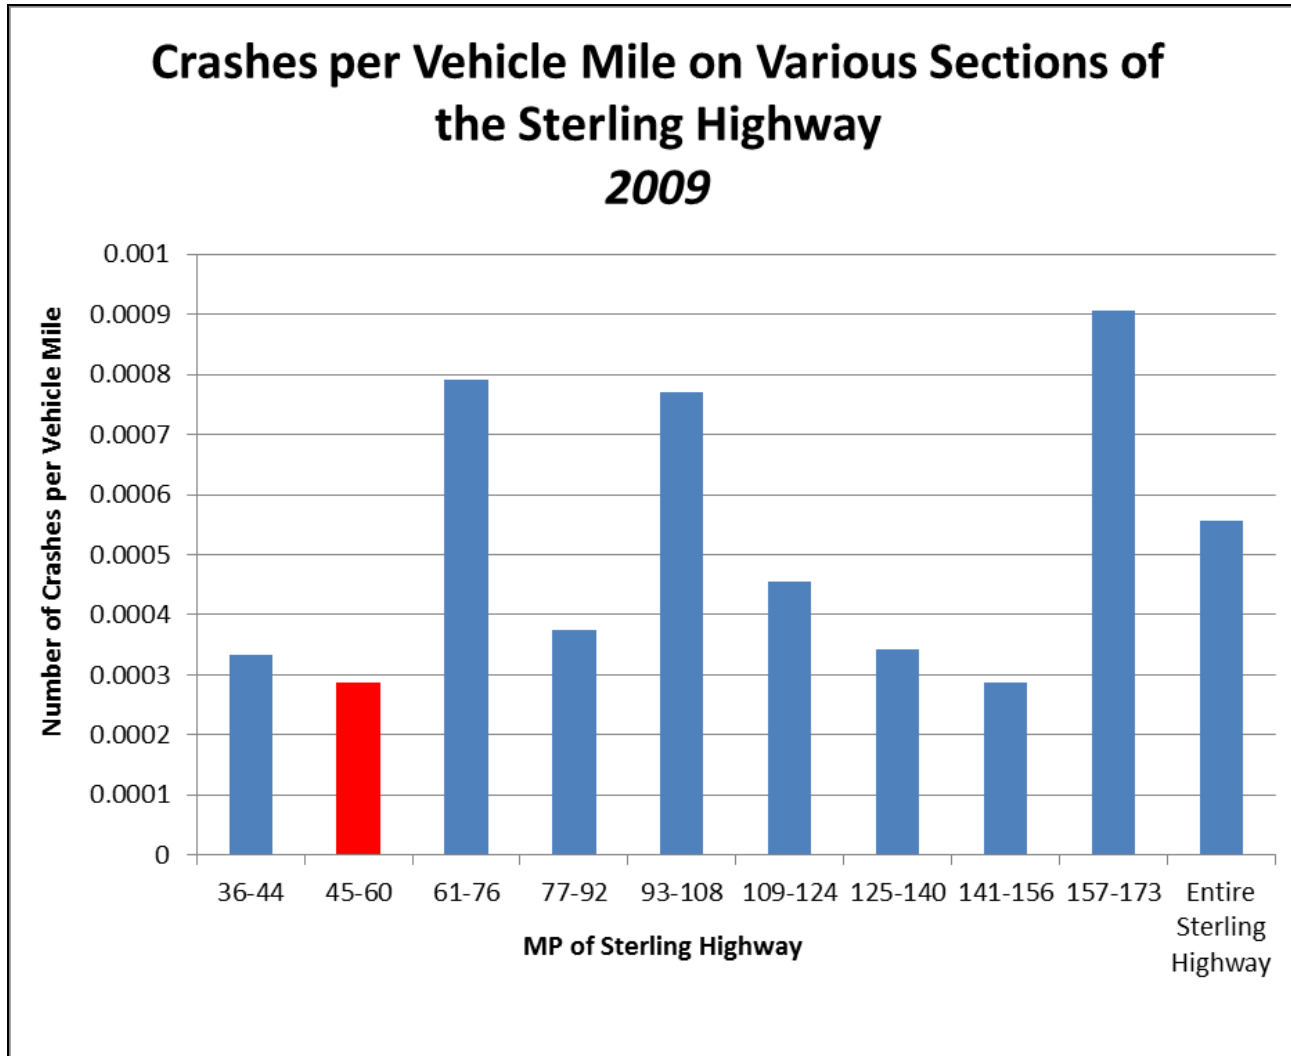


Figure 1. Graph comparing the number of crashes per vehicle mile experienced within different sections of the Sterling Highway in 2009

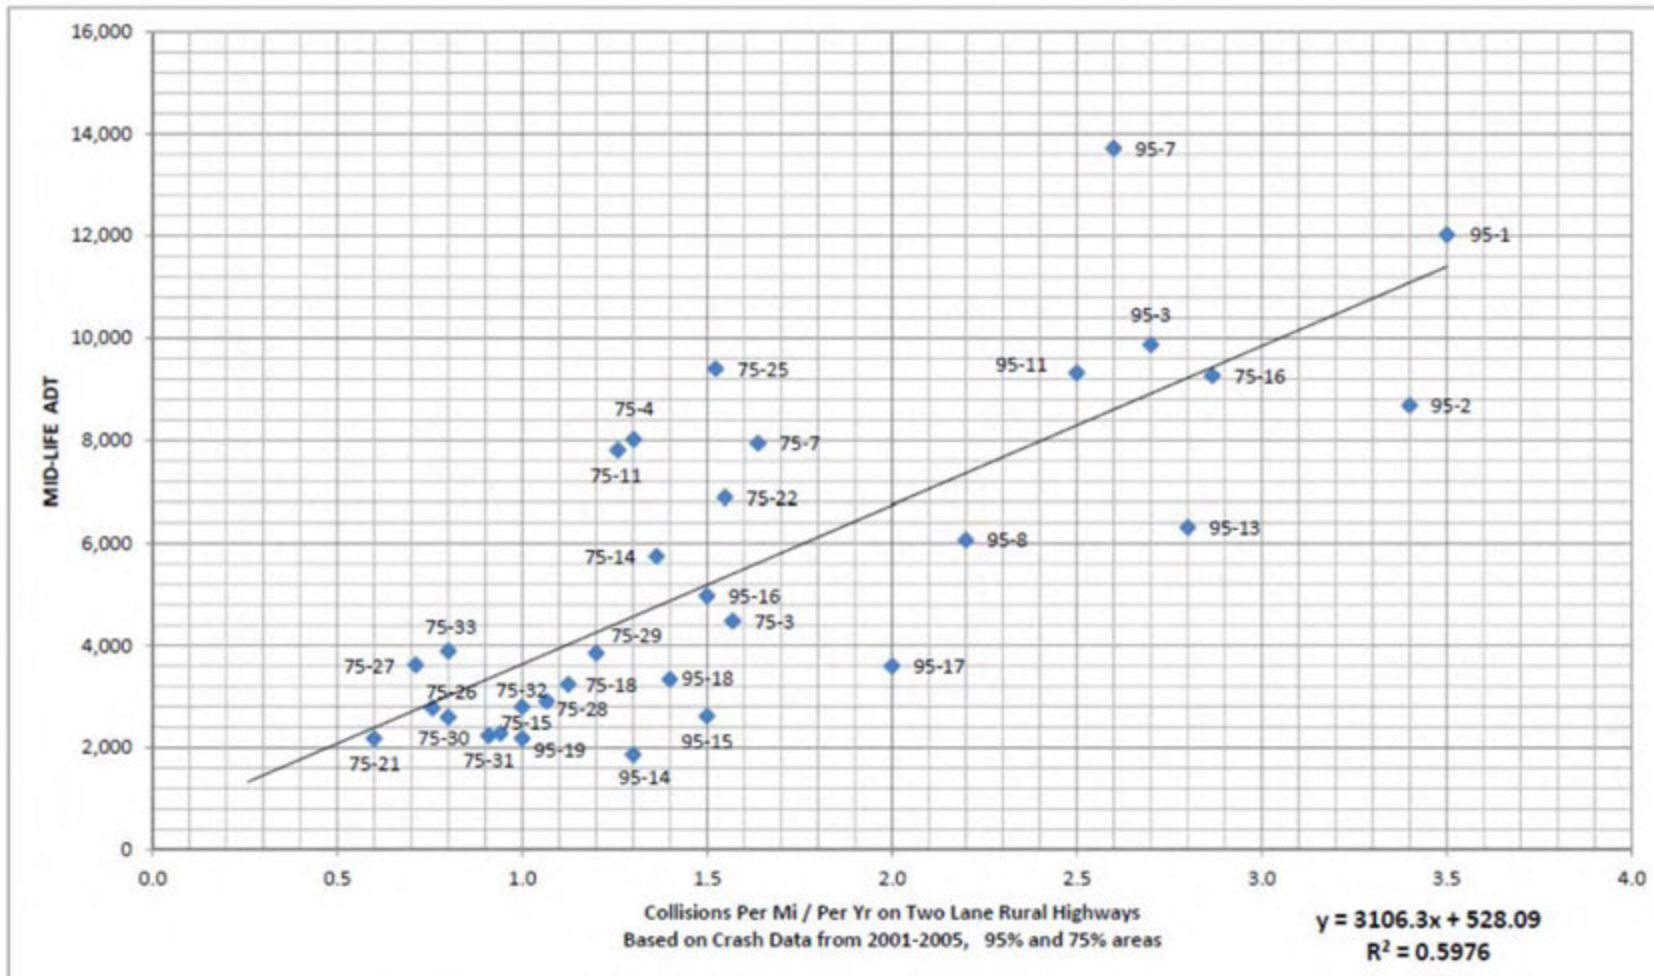


Figure 2. Correlation between increases in traffic volume and the number of moose collisions on two-lane roads at low elevations (less than 200ft) (Thomas 2012)